

# Type EF and Type EFL Concrete Slab Electroform Inserts

For Threaded Rigid Conduit and IMC.

**NEC/CEC:**  
Listed for Ordinary Locations

## Application

- For conduit installed in poured concrete slabs.
- Nail, screw or tack-weld insert to concrete deck form.

## Features

- Inserts available in straight or 90°

## Standard Materials

- Malleable iron


## Standard Finishes

- Zinc plated


## NEC/CEC Certifications and Compliances

- UL Standard: ANSI/UL 514B
- UL Listed: E-11853
- CSA Standard: C22.2 No. 18
- CSA Certified: 009795

## Illustrated Features


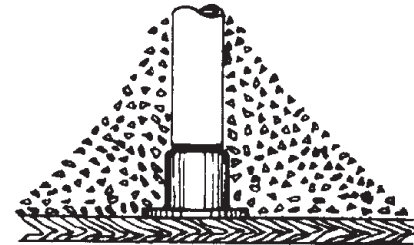


(Wood form shown)

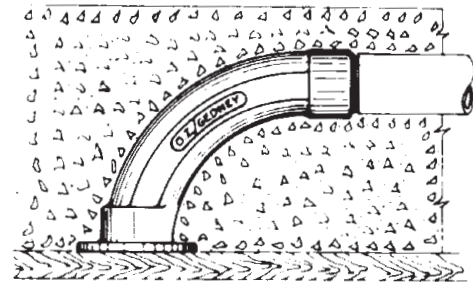

(Wood form shown)

Shown in poured concrete slabs before wood or steel forms are removed.

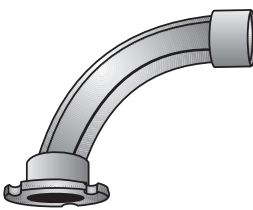	Trade Size (Inches)	Base Dia.	Dimensions in Millimeters (Inches)			Catalog Number
			Turning Radius	Base to Conduit Center	Height	
<b>Straight Conduit Inserts – For Concrete Slab 4" Thick and Up.</b>						
	1/2	49.28 (1.94)	—	44.45 (1.75)	23.88 (0.94)	EF-50
	3/4	55.63 (2.19)	—	50.8 (2)	35.05 (1.38)	EF-75
	1	63.5 (2.5)	—	84.07 (3.31)	41.4 (1.63)	EF-100
<b>90° Conduit Inserts – For Slabs 6" Thick and Up Require Bend Conduit Sweep.</b>						
	1/2	49.28 (1.94)	95.25 (3.75)	79.5 (3.13)	92.2 (3.63)	EFL-50
	3/4	55.63 (2.19)	96.77 (3.81)	77.72 (3.06)	93.73 (3.69)	EFL-75
	1	63.5 (2.5)	96.77 (3.81)	74.68 (2.94)	93.73 (3.69)	EFL-100